


# MONOLO 1-KIT | DOWNLIGHT | BLACK

2510300103

nordlux®

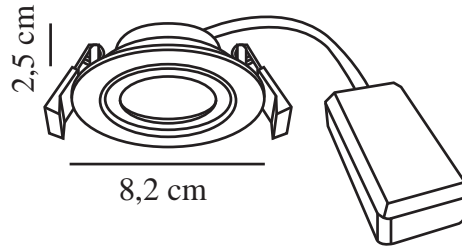

Voltage (V): 220-240 Volt  
IP degree: IP20  
Class (Class 1, Class 2, Class 3):  
Class 2 (Double isolated)  
Socket type: LED Module  
Parallel connection: True

Primary material: Plastic  
Secondary material: Plastic  
Colour: Black

Height (cm): 2.5  
Length (cm): 8.2  
Mount directly into insulation:  
False  
Tilt Angle (°): 30

EAN: 5704924023187  
TUN: 2427475  
Item Number: 2510300103  
Pcs Per Master Carton: 3

Sales Box Height (cm): 13  
Sales Box Width (cm): 13  
Sales Box Depth (cm): 5.5  
Sales Box Volume m<sup>3</sup>: 0.0009  
Product net weight (kg): 0.095

Brightness of light (Lumen): 450  
Colour temperature (Kelvin): 3000  
Ra-value : 80  
Lifetime (hours): 30000  
Beam angle (°) : 36  
Energy class: E  
Actual watt (W): 4.8

- Tool-free installation • 3-step Moodmaker™ dimming using your standard wall switch • Long LED lifespan (30,000 hours)
- Tiltable, directional light • 5-year LED guarantee

Monolo is a downlight with an integrated LED that can be dimmed in three steps using your regular wall switch. The light can be tilted in any direction you choose.

