

INSTALLATION INSTRUCTIONS

IP20 3CCT SWITCHABLE
LED SLIM BATTEN

Moon Storm



PLEASE read these instructions carefully before installation and keep them for reference.



WARNING: IF IN ANY DOUBT ABOUT INSTALLATION, CONSULT A QUALIFIED ENGINEER


1. Please make sure to turn off the power before starting the installation.
2. The light source of these luminaries is not replaceable due to the long life.
3. For indoor use only - IP20.
4. Before installation, you must carefully check the integrity of the product and accessories.
5. When installed, please ensure any products or flammable materials are at least 0.2m distance away.
Not suitable for temperatures above 40 °C.
6. To ensure that the power cord has enough length, do not kink cables. Output cables should be laid separately and at a distance from other cables. A Terminal block is included with the other accessories.
7. The terminal block should be suitably protected and insulated before use.

NOTE: Please comply with all warnings to ensure validity of warranty and personal safety.

Class I Standard



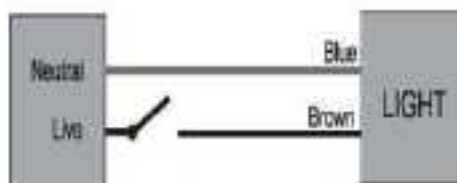







This marking indicates that this product should not be disposed of with other household wastes.



INSTALLATION INSTRUCTIONS

IP20 3CCT SWITCHABLE
LED SLIM BATTEN

DESCRIPTION OF SYMBOLS:

	Conforms to relevant safety standards.		This product complies with conformity requirements of the applicable UK Regulations.
	To reduce the risk of injury, user must read instruction manual.		Class II product - Double Insulated - No earth required.
	Do not dispose of old appliances with domestic rubbish.		
	Non-replaceable light source		
	Non-replaceable control gear		

INSTALLATION INSTRUCTIONS


IP20 3CCT SWITCHABLE
LED SLIM BATTEN

TECHNICAL DATA:

Wattage	20W	40W	50W	60W
BODY TYPE	PC	PC	PC	PC
DF	>0.7	>0.9	>0.9	>0.9
LUMINOUS	2200/2400	4400/4800	5500/6000	6600/7200
ENERGY CLASS	E	E	E	E
CRI	>80			
CCT (colour change)	Dip-switch controlled, changing from to 3000-4000-6500K			
BEAM ANGLE	120°			
IP RATING	IP20			
INPUT POWER	AC: 220-240V~ , 50/60Hz			
OPERATING	-20°C to +40°C			
Cable	75cm			
OPERATING HUMIDITY	10% ----95%			
LUMINOUS EFFICIANCY	2200/2400	4400/4800	5500/6000	6600/7200

INSTALLATION GUIDE:

- 1 Choose the right location, use the steel brackets as a template drill two holes and insert the screw. Make sure the distance between the holes and brackets is no less than 100mm from either end of the unit.

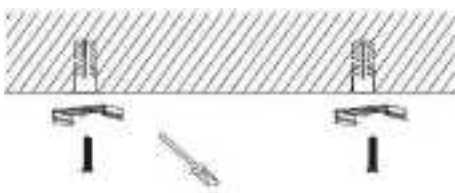

- 2 Insert the plugs into the drilled holes.



Then Place the bracket with its hole over the plug in the wall, then insert the screw through the bracket in the hole in the wall with the plug

INSTALLATION INSTRUCTIONS

IP20 3CCT SWITCHABLE
LED SLIM BATTEN


- 3 Turn off the power** and connect the batten to the mains with a connector and covered by tape if the unit could be exposed to moisture, steam or damp condition or enclosed connector for other areas.



- 4** Align the steel fixings with the grooves on either side of the housing, Press the lamp body firmly into the mounting brackets to fix into position. Ensure the wire is not trapped.



- 5** Slide the lamp body along the mounting bracket to the desired position.

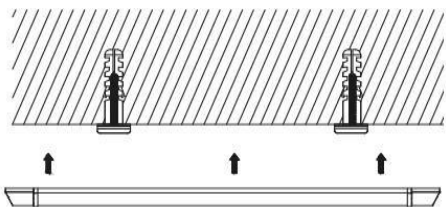

- 6** The batten has now successfully been installed. Reconnect the power.

